TECHNICAL DATA SHEET

# HPL LOCKERS WITH ALUMINIUM PROFILES

*V, T, M, C, P, B, Z and L SERIES*

*by* MEGABLOK

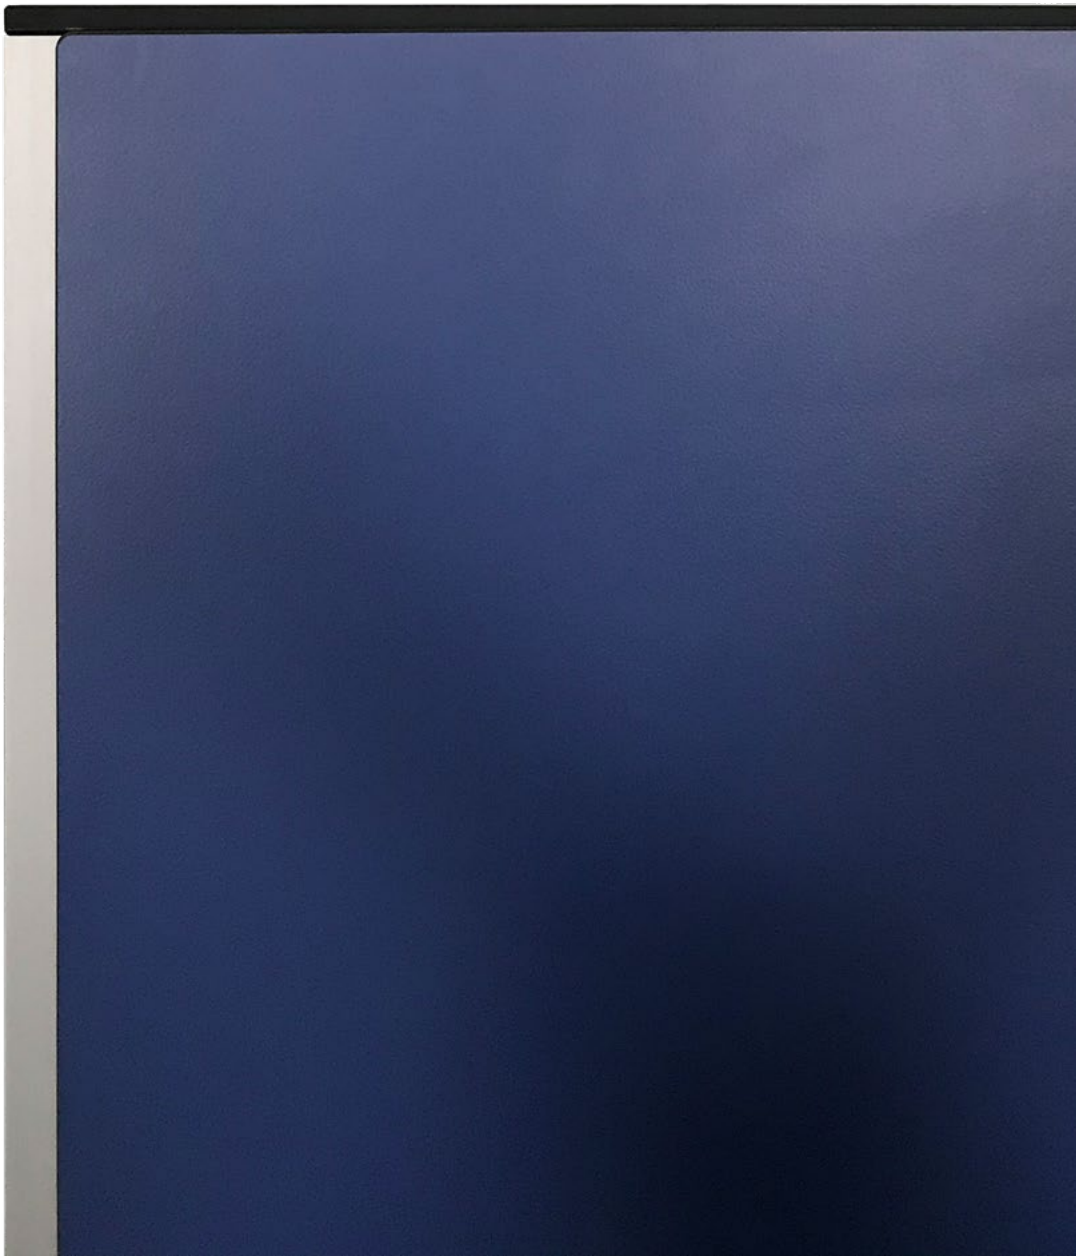

## **FVP** SERIES
**1** door per column

## **FTP** SERIES
**2** doors per column

## **FMP** SERIES
**3** doors per column

## **FCP** SERIES
**4** doors per column

## **FPP** SERIES
**5** doors per column

## **FBP** SERIES
**6** doors per column

## **FZP** SERIES
**8** doors per column

## **FLP** SERIES
**2** doors in **L**

# CHARACTERISTICS

Made of HPL-panels of phenolic resins.
Rigid material, water-resistant, fire-resistant, antibacterial and adequate for wet areas.
Highly resistant against wear, that is why it is ideal for applications with a high index of use and frequent cleaning.
Core of black colour.
According to the european norms EN 438-1 and EN 438-2.
Density 1450 Kg/m3 according to DIN 53479.
Water-absorption of less than 3%.
4 mm thick board on the sides, 10 mm thick on the floor and ceiling and 12 mm thick on the doors.
4 mm thick board on the back sides plus aluminium stabilising profiles.
Rounded edges.
No maintenance required.
4 mm thick grooved phenolic back panel, fully framed.
Aluminium stabilising profiles.
Slide lock with removable cylinder and master key.
Adjustable 150 mm PVC legs.
Aluminium clothes rail with two hanging hooks in a.b.s. (Models FVP, FTP and FLP).
Upper tray (Model FVP).
A2 stainless steel screws.
Numbering plates included.

## Easy cleaning

The nonporous surface repels dirt. Easy cleaning of the HPL, with normal chemical detergents, or with sanitizing products, against which the material is inalterable. In case of cleaning it from graffitis it can be used an organic dissolvent without risk of alteration of the colour.

Resistant against food residuals and colourants, as they do not affect neither the properties nor the appearance of the HPL (phenolic material). The Steel wool, or similar products, are not recommended, as they can scratch the surface and create cavities of corrosión, especially at the stainless Steel components. Take special care with the use of materials which contain chlorides, as they are contraindicated, as they can caus oxidation. Hydrochloric acid or iron products in prolongated contact, are also not recommended. Never use common Steel cleaners for stainless Steel!

# COLOURS

## Body

M-060

## Doors

F-085 F-0074 F-0851 F-0010 F-0011 F-0232 F-0210 F-0725 F-6901 F-2478

F-0318 F-0718 F-0717 F-0193 F-0077 F-0080 FM-100 FM-200 FF-405

# LOCKS

**Standard:** Key lock

Padlockable Polyamide Lock (optional padlock)

Padlockable Metallic Lock 1 (optional combination padlock)

Padlockable Metallic Lock 2 (optional combination padlock)

Metal handle

Coin-operated Lock (coin-return)

Coin-operated Lock + Coin Collect Box (cash box, non coin-return)

Lock of 4 manuals digits with emergency key

Electronic lock combination of 4 digits TELEC

Lock of proximity PROXI 2

Electronic lock combination of 4 digits TELOCK

Electronic lock combination of 4 digits SOLOCK

Electronic lock combination of 4 digits FYLOCK

# OPTIONS

Mailbox Slot

Slope Top

HPL End Base

Decorative end panel

Bracelet of nylon

Elastic bracelet

Door opening limiter 90º.

# COMBINATIONS AND DIMENSIONS

## FVP SERIES




**FVP-30/1**
COD: 53501
**31**kg · **0,28**m³




**FVP-30/2**
COD: 53502
**55**kg · **0,54**m³




**FVP-30/3**
COD: 53509
**79**kg · **0,80**m³




**FVP-30/4**
COD: 53601
**104**kg · **1,07**m³




**FVP-40/1**
COD: 53505
**37**kg · **0,37**m³




**FVP-40/2**
COD: 53506
**66**kg · **0,72**m³




**FVP-40/3**
COD: 53602
**96**kg · **1,07**m³

## FTP SERIES




**FTP-30/1**
COD: 53511
**32**kg · **0,28**m³




**FTP-30/2**
COD: 53512
**56**kg · **0,54**m³




**FTP-30/3**
COD: 53519
**81**kg · **0,80**m³




**FTP-30/4**
COD: 53605
**106**kg · **1,07**m³




**FTP-40/1**
COD: 53515
**37**kg · **0,37**m³




**FTP-40/2**
COD: 53516
**67**kg · **0,72**m³




**FTP-40/3**
COD: 53606
**97**kg · **1,07**m³

To the depth of the changing rooms, the thickness of the type of door chosen must be added:
HPL door: 12 mm thickness.

# COMBINATIONS AND DIMENSIONS

## FMP SERIES




**FMP-30/1**
COD: 53531
**34**kg · **0,28**m³




**FMP-30/2**
COD: 53532
**62**kg · **0,54**m³




**FMP-30/3**
COD: 53539
**89**kg · **0,80**m³




**FMP-30/4**
COD: 53609
**116**kg · **1,07**m³




**FMP-40/1**
COD: 53535
**40**kg · **0,37**m³




**FMP-40/2**
COD: 53536
**74**kg · **0,72**m³




**FMP-40/3**
COD: 53610
**108**kg · **1,07**m³

## FCP SERIES




**FCP-30/1**
COD: 53521
**37**kg · **0,28**m³




**FCP-30/2**
COD: 53522
**67**kg · **0,54**m³




**FCP-30/3**
COD: 53529
**97**kg · **0,80**m³




**FCP-30/4**
COD: 53613
**127**kg · **1,07**m³




**FCP-40/1**
COD: 53525
**44**kg · **0,37**m³




**FCP-40/2**
COD: 53526
**81**kg · **0,72**m³




**FCP-40/3**
COD: 53614
**118**kg · **1,07**m³

To the depth of the changing rooms, the thickness of the type of door chosen must be added:
HPL door: 12 mm thickness.

# COMBINATIONS AND DIMENSIONS

## FPP SERIES




**FPP-30/1**
COD: 53551
**40**kg · **0,28**m³




**FPP-30/2**
COD: 53552
**73**kg · **0,54**m³




**FPP-30/3**
COD: 53559
**105**kg · **0,80**m³




**FPP-30/4**
COD: 53617
**138**kg · **1,07**m³




**FPP-40/1**
COD: 53565
**47**kg · **0,37**m³




**FPP-40/2**
COD: 53566
**88**kg · **0,72**m³




**FPP-40/3**
COD: 53618
**128**kg · **1,07**m³

## FBP SERIES




**FBP-30/1**
COD: 53561
**42**kg · **0,28**m³




**FBP-30/2**
COD: 53562
**78**kg · **0,54**m³




**FBP-30/3**
COD: 53569
**113**kg · **0,80**m³




**FBP-30/4**
COD: 53621
**149**kg · **1,07**m³




**FBP-40/1**
COD: 53575
**51**kg · **0,37**m³




**FBP-40/2**
COD: 53576
**94**kg · **0,72**m³




**FBP-40/3**
COD: 53622
**139**kg · **1,07**m³

To the depth of the changing rooms, the thickness of the type of door chosen must be added:
HPL door: 12 mm thickness.

# COMBINATIONS AND DIMENSIONS

## FZP SERIES




**FZP-30/1**
COD: 53581
**48**kg · **0,28**m³




**FZP-30/2**
COD: 53582
**89**kg · **0,54**m³




**FZP-30/3**
COD: 53589
**129**kg · **0,80**m³




**FZP-30/4**
COD: 53625
**170**kg · **1,07**m³




**FZP-40/1**
COD: 53585
**57**kg · **0,37**m³




**FZP-40/2**
COD: 53586
**108**kg · **0,72**m³




**FZP-40/3**
COD: 53626
**159**kg · **1,07**m³

## FLP SERIES




**FLP-30/1**
COD: 53541
**38**kg · **0,28**m³




**FLP-30/2**
COD: 53542
**70**kg · **0,54**m³




**FLP-30/3**
COD: 53549
**101**kg · **0,80**m³




**FLP-30/4**
COD: 53629
**132**kg · **1,07**m³




**FLP-40/1**
COD: 53545
**44**kg · **0,36**m³




**FLP-40/2**
COD: 53546
**80**kg · **0,71**m³




**FLP-40/3**
COD: 53630
**117**kg · **1,05**m³

To the depth of the changing rooms, the thickness of the type of door chosen must be added:
HPL door: 12 mm thickness.