

TECHNICAL DATA SHEET
SPECIAL LOCKERS
CLEANING MATERIAL LOCKER
by  **MEGABLOK**





CHARACTERISTICS

Manufactured with cold laminated steel sheet metal, quality DC 01, according to the European Norm EN 10130 with a carbon content of less than 0.12%.

Metal thickness of 0.6 mm.

Previous passivation and degreasing treatment with amorphous phosphating before painting.

Dried in a polymerization oven at 180°C during 15 minutes.

Painted with Epoxy-polyester-powder, through robotized cabins.

Body and door in grey RAL 7035, micro-textured finish. Minimum thickness of the painting: 50 microns.

Door with welded reinforcement and ventilation rosette.


Chromed standard cylinder locks with two keys per lock.

Includes plastic hanging box and coat rack.





COLOURS

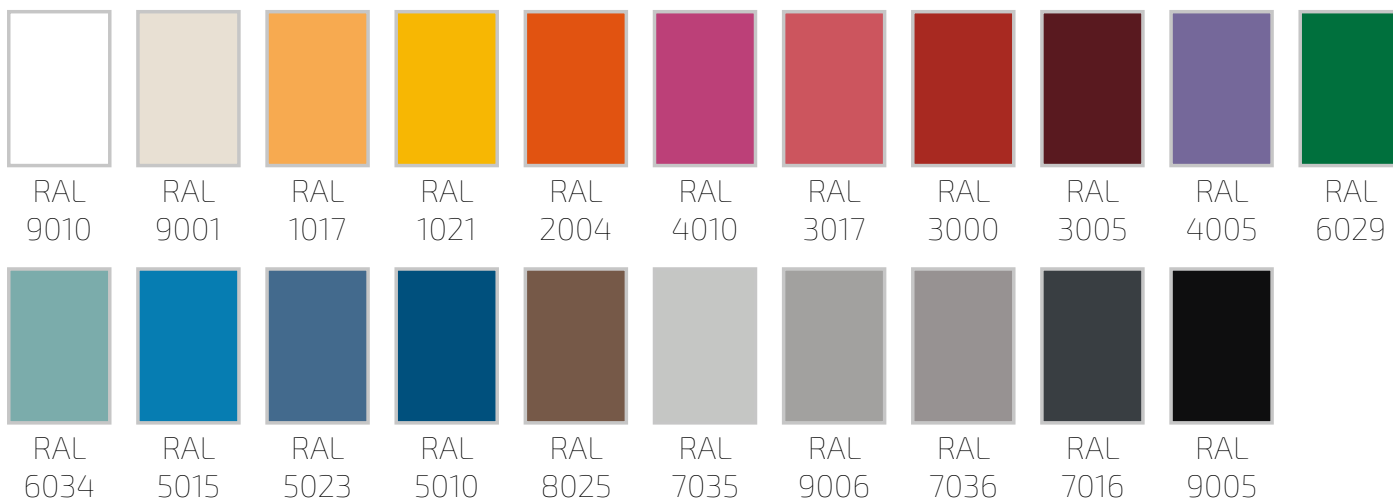

LOCKS



COMBINATIONS AND DIMENSIONS



AL-1
COD: 42000

INTERIOR MEASUREMENTS (mm)

MODEL	INTERIOR MEASUREMENTS (mm)		
	HEIGHT	WIDTH	DEPTH
AL-1	1.692/490	432/225	473