


TECHNICAL DATA SHEET **LEFT-LUGGAGE LOCKERS**

LEFT-LUGGAGE **PLUS** SERIES





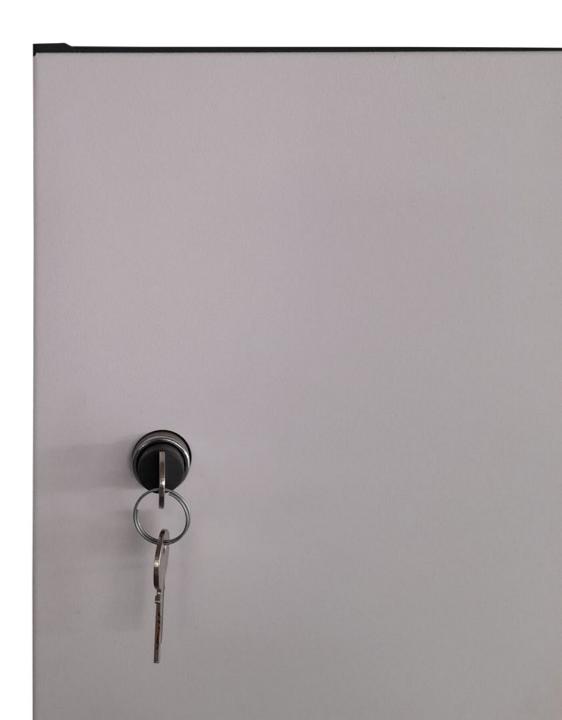







CHARACTERISTICS

Manufactured with cold laminated steel sheet metal, quality DC 01, according to the European Norm EN 10130 with a carbon content of less than 0.12%.

Metal thickness of 0.8 mm.

Previous passivation and degreasing treatment with amorphous phosphating before painting.

Dried in a polymerization oven at 180°C during 15 minutes.

Painted with Epoxy-polyester-powder, through robotized cabins.

Key lock with removable cylinder and master key. With two user keys.

Bisagras de cazoleta regulables, una de ellas con freno para cierre suave.

Body

Painted in grey RAL 7035 Micro.textured finish. Minimum thickness of the painting: 50 microns.

Metal doors

Painted in blue RAL 5010 or grey RAL 7035, micro-textured finish.

Minimum thickness of 50 microns.

Sandwich-type metal.

Borders without cutting edges.

Melamine door option

Doors in melamine or hydrophobic melamine of one design at two faces. 19 mm thicknesses. PVC-edged.

HPL door option

Made of HPL-panels of phenolic resins.

Rigid material, water-resistant, fire-resistant, antibacterial and adequate for wet areas.

Highly resistant against wear, that is why it is ideal for applications with a high index of use and frequent cleaning. Core of black colour.

According to the european norms EN 438-1 and EN 438-2. Density 1450 Kg/m3 according to DIN 53479. Water-absorption of less than 3%. Side panels of 10 mm thickness.

Maintenance-free.

















MELAMINE COLOURS



HPL COLOURS













LOCKS



Standard: Key lock



Padlockable Polyan de Lock (ontional padlock)



Padlockable Metallic Lock 1 (optional



Padlockable Metallic Lock 2 (optional combination padlock)



Metal handle



Coin-operated Lock (coin-return)



Coin-operated Lock + Coin Collect Box (cash box, non



Lock of 4 manuals digits with emergency key



Electronic lock combination of 4 digits TELEC



Lock of proximity



Electronic lock combination of 4 digits TELOCK



Electronic lock combination of 4 digits SOLOCK



Electronic lock combination of 4 digits FYLOCK

OPTIONS



Mailbox Slot



Bracelet of nylon



Elastic bracelet



Numeration plate


COMBINATIONS AND DIMENSIONS



DEP351-PLUS-MH(OD: 72253

DEP351-PLUS-FEN

COD: **72256**




COD: **72251**

DEP352-PLUS-MH(OD: 72254

DEP353-PLUS-FEN

COD: **72257**



DEP353-PLUS-ACERO(OD: 72252

DEP352-PLUS-MH(OD: 72255

DEP353-PLUS-FENCOD: 72258

To the depth of the changing rooms, the thickness of the type of door chosen must be added: Metal door: 19 mm thickness.

Metal door: 19 mm thickness. Melamine door: 18 mm thickness. HPL door: 12 mm thickness.