


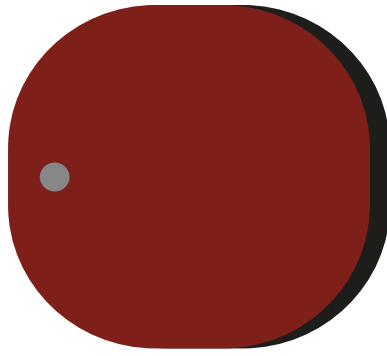



TECHNICAL DATA SHEET

**HPL LOCKERS**


*V, T, M, C, P, B, Z and L SERIES*

*by*  **MEGABLOK**

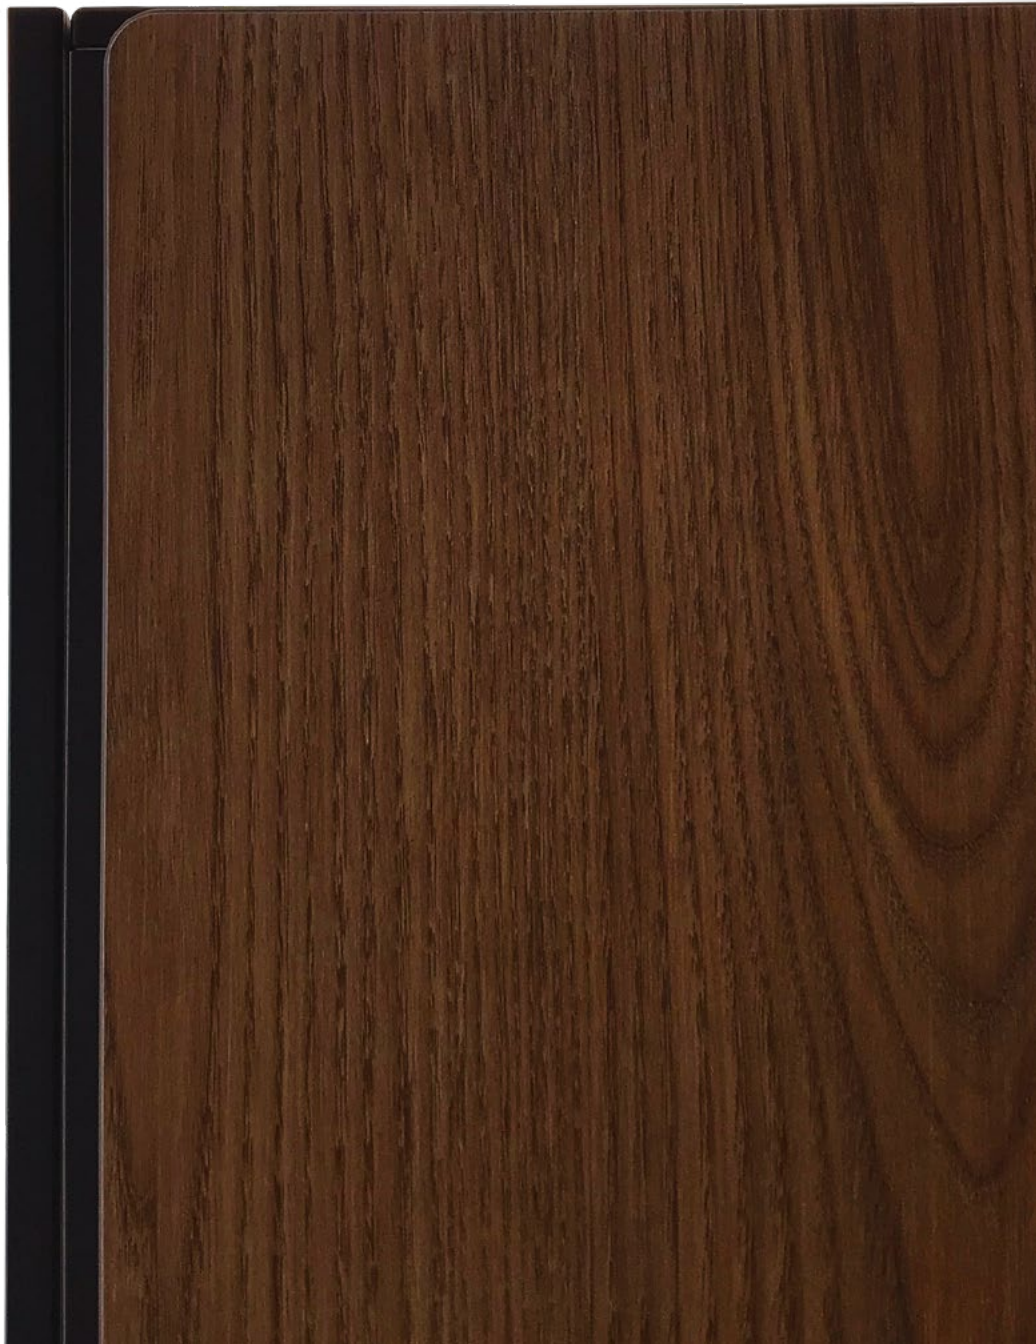


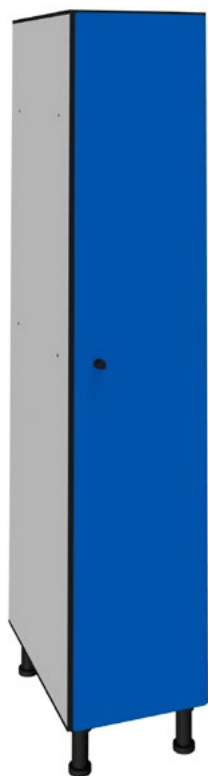


**FV SERIES**  
1 door per column

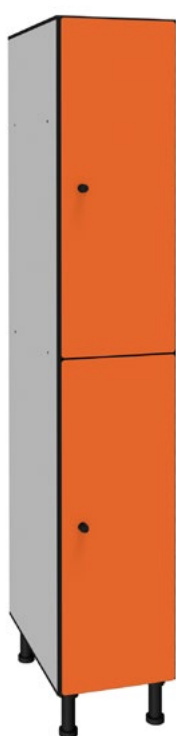


**FT SERIES**  
2 doors per column

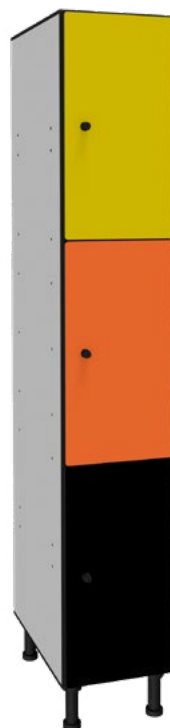


**FM SERIES**  
3 doors per column

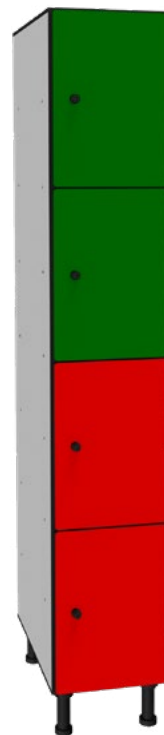


**FC SERIES**  
4 doors per column

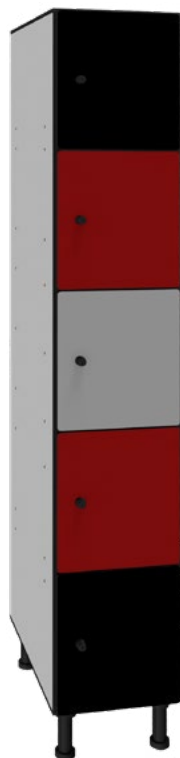

**FP SERIES**  
5 doors per column

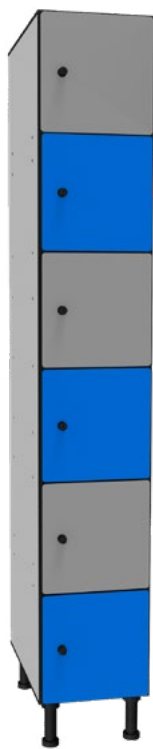

**FB SERIES**  
6 doors per column

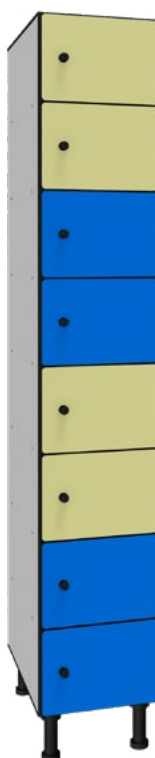

**FZ SERIES**  
8 doors per column



**FL SERIES**  
2 doors in L



**FLH SERIES**  
2 doors in L



## CHARACTERISTICS

### Technical features

Made of HPL-panels of phenolic resins.

Rigid material, water-resistant, fire-resistant, antibacterial and adequate for wet areas.

Highly resistant against wear, that is why it is ideal for applications with a high index of use and frequent cleaning.

Core of black colour.

According to the european norms EN 438-1 and EN 438-2.

Density 1450 Kg/m<sup>3</sup> according to DIN 53479.

Water-absorption of less than 3%.

Side panels of 10 mm thickness.

### Doors

Panel of 12 mm thickness for doors.

Rounded edges.

### Back panel

Backpanel grooved HPL of 4 mm thickness and is absolutely framed.

### Accessories

Key lock with removable cylinder and master key. With two user keys.

PVC legs, adjustable to 150 mm.

Aluminium coat rod with two a.b.s. hooks. (Models FV, FT and FL).

Internal shelf of 10 mm thickness at the model FV.

Screws of stainless steel A2. Cup hinges, double zinc plated and with triple regulation.

Numeration plates included.

One hinge with brake at each door.

Adjustable PVC-legs.

Maintenance-free.


### Easy cleaning

The nonporous surface repels dirt. Easy cleaning of the HPL, with normal chemical detergents, or with sanitizing products, against which the material is inalterable. In case of cleaning it from graffitis it can be used an organic dissolvent without risk of alteration of the colour.

Resistant against food residuals and colourants, as they do not affect neither the properties nor the appearance of the HPL (phenolic material). The Steel wool, or similar products, are not recommended, as they can scratch the surface and create cavities of corrosión, especially at the stainless Steel components. Take special care with the use of materials which contain chlorides, as they are contraindicated, as they can caus oxidation. Hydrochloric acid or iron products in prolonged contact, are also not recommended. Never use common Steel cleaners for stainless Steel!


## COLOURS

### Body



M-060

### Doors



F-085



F-0074



F-0851



F-0010



F-0011



F-0232



F-0210



F-0725



F-6901



F-2478



F-0318



F-0718



F-0717




F-0193



F-0077




F-0080



FM-100



FM-200



FF-405

## LOCKS



**Standard:** Key lock



Padlockable Metallic Lock 2 (optional combination padlock)



Metal handle



Coin-operated Lock (coin-return)



Coin-operated Lock + Coin Collect Box (cash box, non coin-return)



Lock of 4 manual digits with emergency key



Electronic lock combination of 4 digits TELEC



Lock of proximity PROXI 2



Electronic lock combination of 4 digits TELOCK



Electronic lock combination of 4 digits SOLOCK




Electronic lock combination of 4 digits FYLOCK

## OPTIONS



Mailbox Slot



Slope Top



HPL End Base



Decorative end panel



Bracelet of nylon



Elastic bracelet




Door opening limiter 90°.




# COMBINATIONS AND DIMENSIONS

## FV SERIES

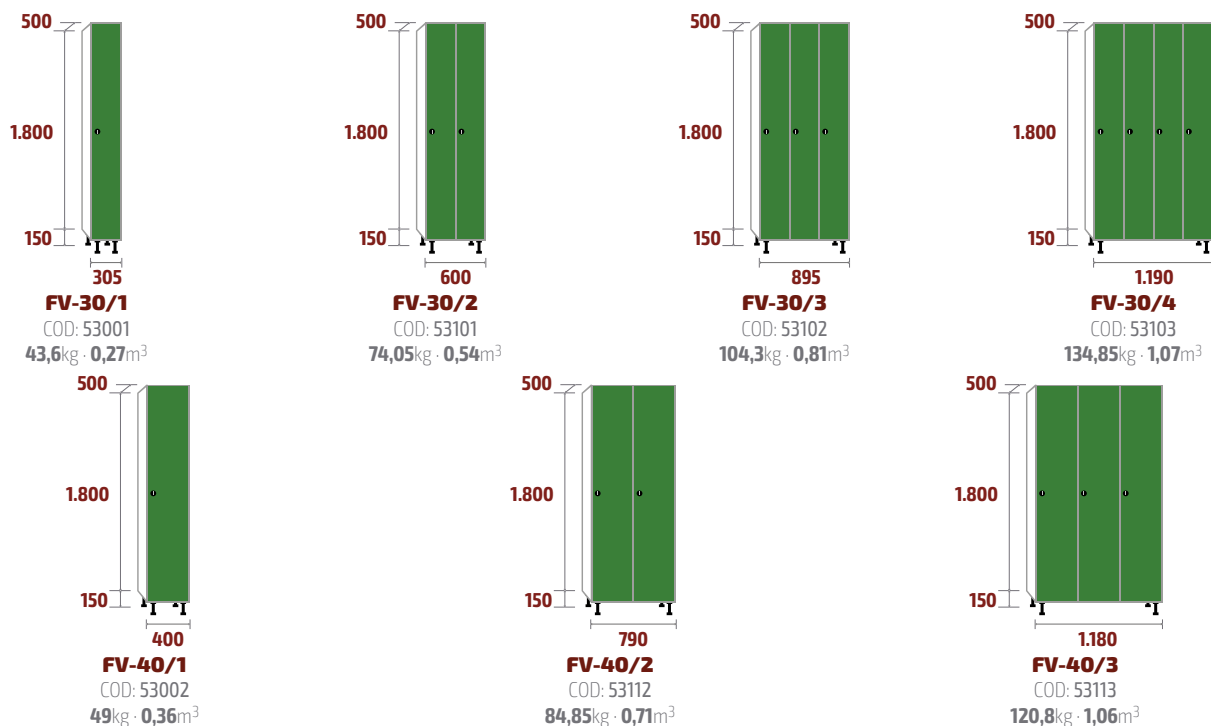

## FT SERIES

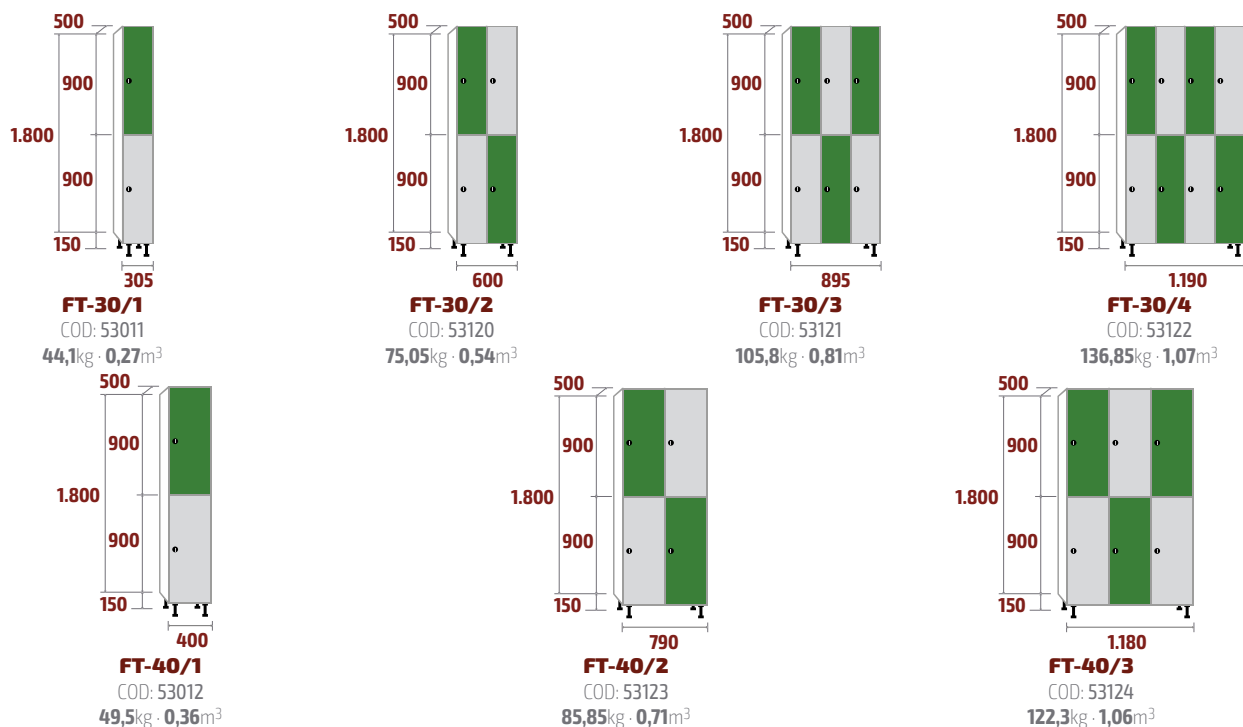


To the depth of the changing rooms, the thickness of the type of door chosen must be added:  
HPL door: 12 mm thickness.




## COMBINATIONS AND DIMENSIONS


### FM SERIES




**FM-30/1**  
COD: 53031  
47kg · 0,27m<sup>3</sup>




**FM-30/2**  
COD: 53131  
80kg · 0,54m<sup>3</sup>




**FM-30/3**  
COD: 53132  
114kg · 0,81m<sup>3</sup>

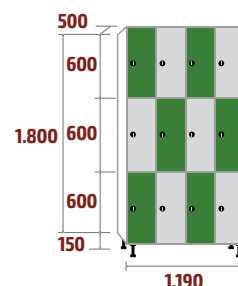


**FM-30/4**  
COD: 53133  
148kg · 1,07m<sup>3</sup>



**FM-40/1**  
COD: 53032  
53kg · 0,36m<sup>3</sup>




**FM-40/2**  
COD: 53134  
93kg · 0,71m<sup>3</sup>

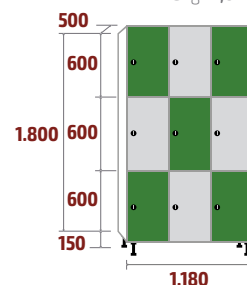


**FM-40/3**  
COD: 53135  
133kg · 1,06m<sup>3</sup>


### FC SERIES




**FC-30/1**  
COD: 53021  
50kg · 0,27m<sup>3</sup>




**FC-30/2**  
COD: 53141  
86kg · 0,54m<sup>3</sup>




**FC-30/3**  
COD: 53142  
122kg · 0,81m<sup>3</sup>

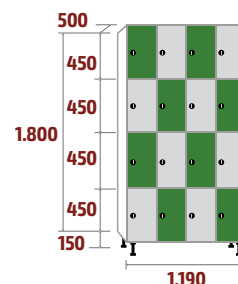


**FC-30/4**  
COD: 53143  
158kg · 1,07m<sup>3</sup>



**FC-40/1**  
COD: 53022  
56kg · 0,36m<sup>3</sup>



**FC-40/2**  
COD: 53144  
99kg · 0,71m<sup>3</sup>




**FC-40/3**  
COD: 53145  
143kg · 1,06m<sup>3</sup>

To the depth of the changing rooms, the thickness of the type of door chosen must be added:  
HPL door: 12 mm thickness.




# COMBINATIONS AND DIMENSIONS


## FP SERIES




**FP-30/1**  
COD: 53051  
52kg · 0,27m<sup>3</sup>




**FP-30/2**  
COD: 53151  
91kg · 0,54m<sup>3</sup>




**FP-30/3**  
COD: 53152  
130kg · 0,81m<sup>3</sup>

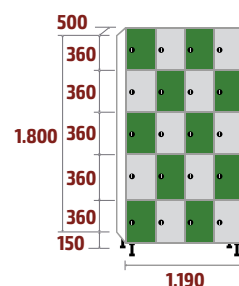


**FP-30/4**  
COD: 53153  
169kg · 1,07m<sup>3</sup>



**FP-40/1**  
COD: 53052  
60kg · 0,36m<sup>3</sup>




**FP-40/2**  
COD: 53154  
106kg · 0,71m<sup>3</sup>




**FP-40/3**  
COD: 53155  
153kg · 1,06m<sup>3</sup>


## FB SERIES




**FB-30/1**  
COD: 53061  
55kg · 0,27m<sup>3</sup>




**FB-30/2**  
COD: 53161  
96kg · 0,54m<sup>3</sup>




**FB-30/3**  
COD: 53162  
138kg · 0,81m<sup>3</sup>

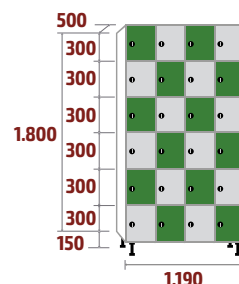


**FB-30/4**  
COD: 53163  
180kg · 1,07m<sup>3</sup>



**FB-40/1**  
COD: 53062  
63kg · 0,36m<sup>3</sup>



**FB-40/2**  
COD: 53164  
113kg · 0,71m<sup>3</sup>




**FB-40/3**  
COD: 53165  
164kg · 1,06m<sup>3</sup>

To the depth of the changing rooms, the thickness of the type of door chosen must be added:  
HPL door: 12 mm thickness.




# COMBINATIONS AND DIMENSIONS


## FZ SERIES




**FZ-30/1**  
COD: 53081  
60kg · 0,27m<sup>3</sup>




**FZ-30/2**  
COD: 53171  
107kg · 0,54m<sup>3</sup>




**FZ-30/3**  
COD: 53172  
154kg · 0,81m<sup>3</sup>




**FZ-30/4**  
COD: 53173  
201kg · 1,07m<sup>3</sup>

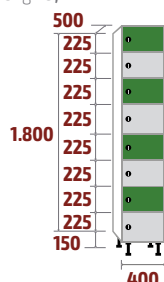

**FZ-40/1**  
COD: 53082  
70kg · 0,36m<sup>3</sup>




**FZ-40/2**  
COD: 53174  
127kg · 0,71m<sup>3</sup>




**FZ-40/3**  
COD: 53175  
184kg · 1,06m<sup>3</sup>


## FL SERIES




**FL-30/1**  
COD: 53041  
51kg · 0,27m<sup>3</sup>

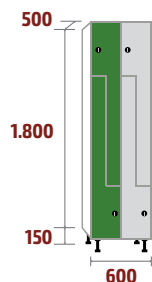


**FL-30/2**  
COD: 53181  
92kg · 0,54m<sup>3</sup>




**FL-30/3**  
COD: 53182  
134kg · 0,81m<sup>3</sup>

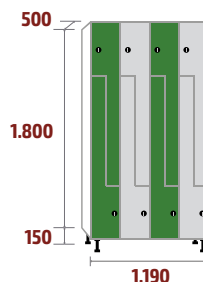


**FL-30/4**  
COD: 53183  
175kg · 1,07m<sup>3</sup>

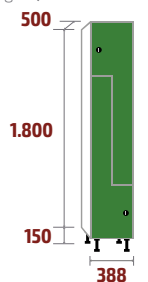

**FL-40/1**  
COD: 53042  
56kg · 0,36m<sup>3</sup>



**FL-40/2**  
COD: 53184  
103kg · 0,71m<sup>3</sup>



**FL-40/3**  
COD: 53185  
150kg · 1,06m<sup>3</sup>

To the depth of the changing rooms, the thickness of the type of door chosen must be added:  
HPL door: 12 mm thickness.





## COMBINATIONS AND DIMENSIONS

### FLH SERIES

