


TECHNICAL DATA SHEET MONOBLOK-E LOCKERS

V, T, M, C, P, B, Z and 10 SERIES





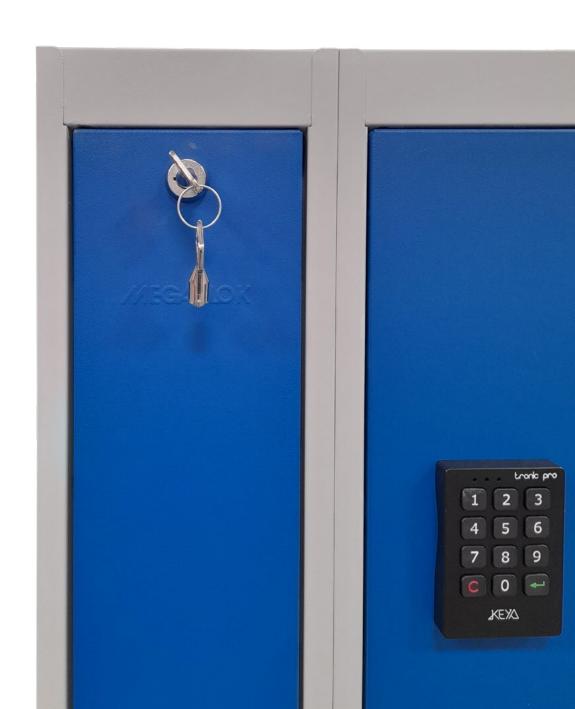













STRIES

2 doors per column



SM® SERIES

3 doors per column



SC SERIES
4 doors per column



SP SERIES

5 doors per column




SB SERIES

6 doors per column



SZ SERIES
8 doors per column

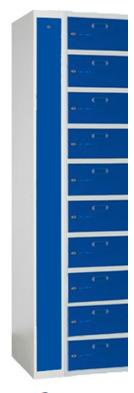

\$10 € SERIES 10 doors per column







CHARACTERISTICS

Manufactured with cold laminated steel sheet metal, quality DC 01, according to the European Norm EN 10130 with a carbon content of less than 0.12%.

Metal thickness of 0.6 mm.

Previous passivation and degreasing treatment with amorphous phosphating before painting.

Dried in a polymerization oven at 180°C during 15 minutes.

Painted with Epoxy-polyester-powder, through robotized cabins.

Includes circuit breaker.

Body

Painted in grey RAL 7035 Micro.textured finish. Minimum thickness of the painting: 50 microns.

Welded shelf and coat rod at the SV-Series.

Coat rod at the ST-Series.

Doors

Painted in blue RAL 5010 or grey RAL 7035, micro-textured finish.

Minimum thickness of 50 microns.

Doors with perimetric double folding.

Borders without cutting edges. Hidden hinges.

With name-card holder.

With ventilation rosettes at the models SV, ST, SM and SC.

Chromed standard cylinder locks with two keys per lock.

SV-Series with with longitudinal reinforcement.

Electrical characteristics

Plugged into 220V power supply.

Triple USB cable (Note: iPhone and iPad devices that only support charging with Type-C connector are not compatible with this cable. Compatible cable options available upon request).

Schuko type plug.

Includes circuit breaker.

Cleaning

It can be easily cleaned with neutral, non-aggressive cleaning agents such as glass cleaners, all-purpose cleaners, etc., using a soft cloth. Steel wool or similar products are not recommended, as they may scratch the surface and create corrosion pitting. Do not use materials containing chlorides, as they are contraindicated as they cause rust. Hydrochloric acid or iron products in prolonged contact are also not recommended.

VERY IMPORTANT: After using the product, it must be thoroughly dried (with a soft cloth) as moisture will cause corrosion on the metal lockers.











COLOURS



LOCKS



Standard: Key lock



Padlockable Polyam de Lock (ontional nadlock)



Padlockable Metallic Lock 1 (optional combination padlock)



Padlockable Metallic Lock 2 (optional combination padlock)



Metal handle



Coin-operated Lock (coin-return)



Coin-operated Loc Coin Collect Box (cash box, non



Lock of 4 manuals digits with emergency key



Electronic lock combination of 4 digits TELEC



Lock of proximity PROXI 2



Lock of shutter-bolt



Electronic lock combination of 4 digits TELOCK



Electronic lock combination of 4 digits SOLOCK



Electronic lock combination of 4 digits FYLOCK



OPTIONS



Mailbox Slot



Antibacterian paint



Bracolot of nylon



Elastic bracele



Painted steel legs



360° wheels with brakes. 2 of them with brake











ELECTRICAL OPTIONS









Plug

USB cables* and plug

Triple USB cable (Note: iPhone and iPad devices that only support charging with Type-C connector are not compatible with this cable. Compatible cable options available upon request).

COMBINATIONS AND DIMENSIONS

500 500 500 **SV-E** SERIES **ST-E** SERIES SV-30/1 € SV-30/2 @ SV-40/1 8 SV-40/2 € ST-30/1 @ ST-30/2 € ST-40/1 8 ST-40/2 € 500 **SM-E** SERIES SC-E SERIES 1.800 **SM-30/1 2** COD: 72008 SM-30/20 COD: 72009 SM-40/28 COD: 72011 SC-40/1 & COD: 72014 SC-40/2 © COD: 72015 SM-40/18 SC-30/1 8 SC-30/2 8 500 500 500 **SP-E** SERIES **SB-E** SERIES 1.800 1.800 1.800 1.800 300 150 300 150 300 300 150 300 SP-30/1 € SP-30/2 € SP-40/1 € SP-40/2 € SB-30/1 @ SB-30/2 € SB-40/1@ SB-40/2 @ **S10-E** SERIES **SZ-E** SERIES 1.800 1.800 1.800 1.800 1.800

SZ-40/2 @

150 300

S10-30/1 @

300 150 300

S10-30/2 8

S10-40/1 €

S10-40/2 €

150 300

SZ-30/1 €

300 150 300

SZ-30/2 €

SZ-40/1 @