



TECHNICAL DATA SHEET
SEATS IN MELAMINE





BANC-ME-1000



BANC-ME-1500



BANC-ME-2000

CHARACTERISTICS

Chassis

Manufactured en steel tube of 1.5 mm thickness.

Painted en grey RAL 7035 Micro-textured.

Frame, tubes for fixation of the slats with hooks and legs made of steel tube of 25x25mm.

With shoe rack.

Slats


Made of médium density fiber panel of 19 mm thickness, covert with decorative paper, impregnated with melamine resins.

GENERAL CHARACTERISTICS OF THE AGGLOMERATE SUPPORT


Property	Test method	Requirement
Thickness (atone and the same panel and between panels)	UNE-EN 324-1	±0.3mm
Length (Between nominal and real)	UNE-EN 324-1	±5.0mm
Width (Between nominal and real)	UNE-EN 324-1	±5.0mm
Squared timber cut	UNE-EN 324-2	2.0mm/m
Content of humidity	UNE-EN 322	Between 5% y 13%
Density (variation at the average density of a panel)	UNE-EN 323	±10%
Formaldehyd (Class E1)	UNE-EN 120	Less than 8 mg/100 g dry panel



SLATS COLOURS

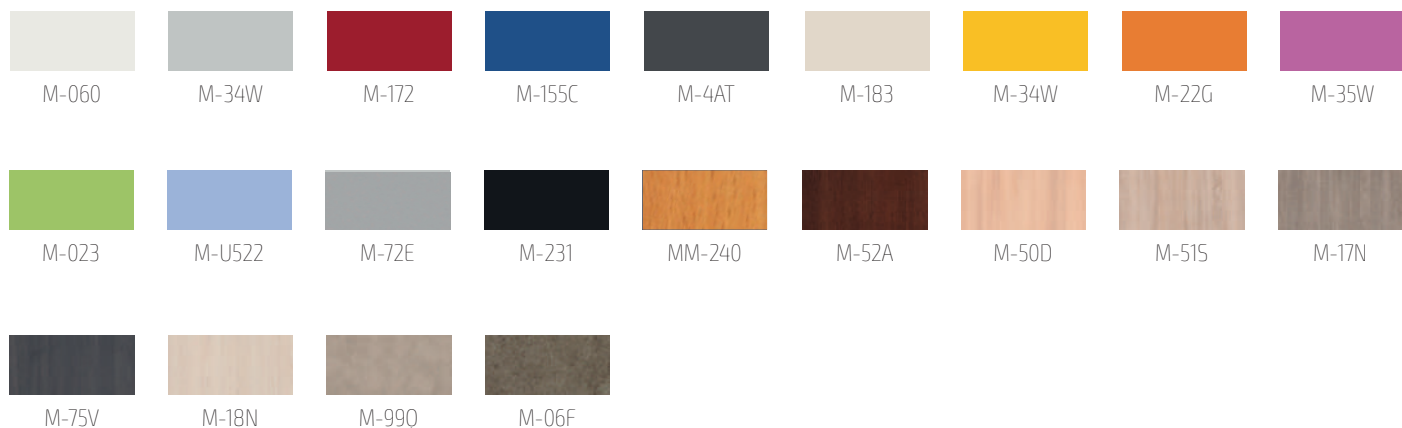


CHASSIS COLOURS

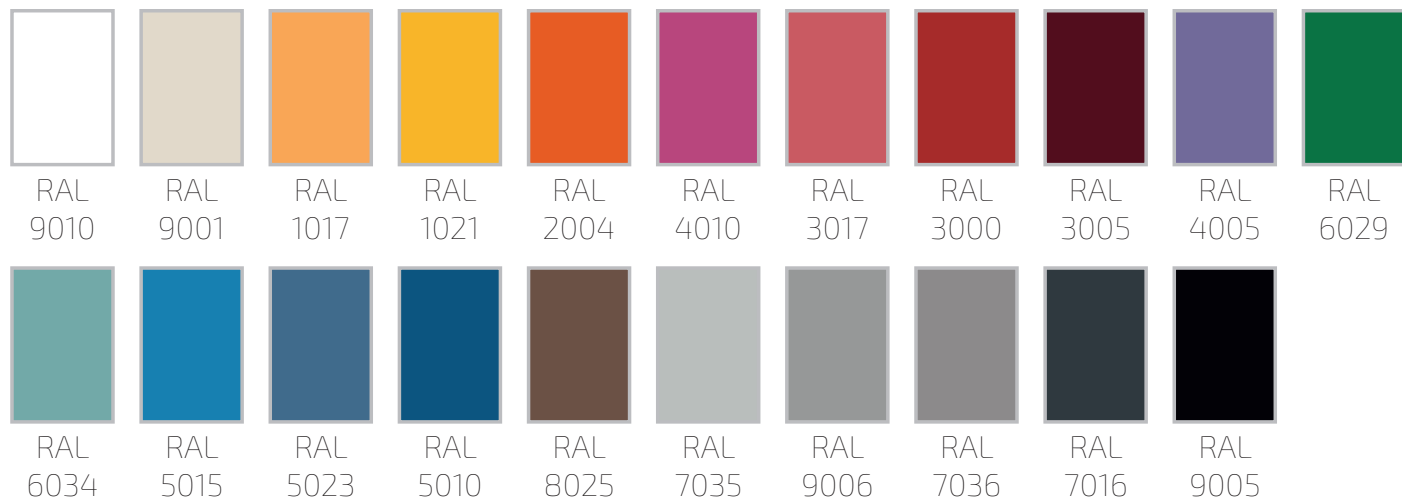


OPTIONS




COMBINATIONS AND DIMENSIONS



BANC-ME-1A000
COD: 79008
12kg · 0,19m³



BANC-ME-1500
COD: 79009
16,5kg · 0,29m³



BANC-ME-2000
COD: 79011
20,5kg · 0,38m³