

TECHNICAL DATA SHEET
LEFT-LUGGAGE LOCKERS
GOLF SERIES

GOLF

CHARACTERISTICS

Welded monoblok locker manufactured of cold laminated steel sheet metal, quality DC01, according to the european norm EN 10130 with a carbon content of less than 0.12%. Thickness of 0.8 mm.

Point welding process.

Previous treatment of passivating and degreasing with amorph bonderizing before performing the painting process.

Dried in a polimerization oven at 180°C during 15 minutes Painting with Epoxy-polyester powder in robotized cabins.

Body and doors in grey RAL 7035 Micro textured finish, Minimum thickness of the painting: 50 microns.


With chromed cylinder lock with two keys or with coin operated lock (1,- € lock, coin-return system) with removable cylinder with 2 keys.

Union-screws included.

Monoblok construction.




COLOURS

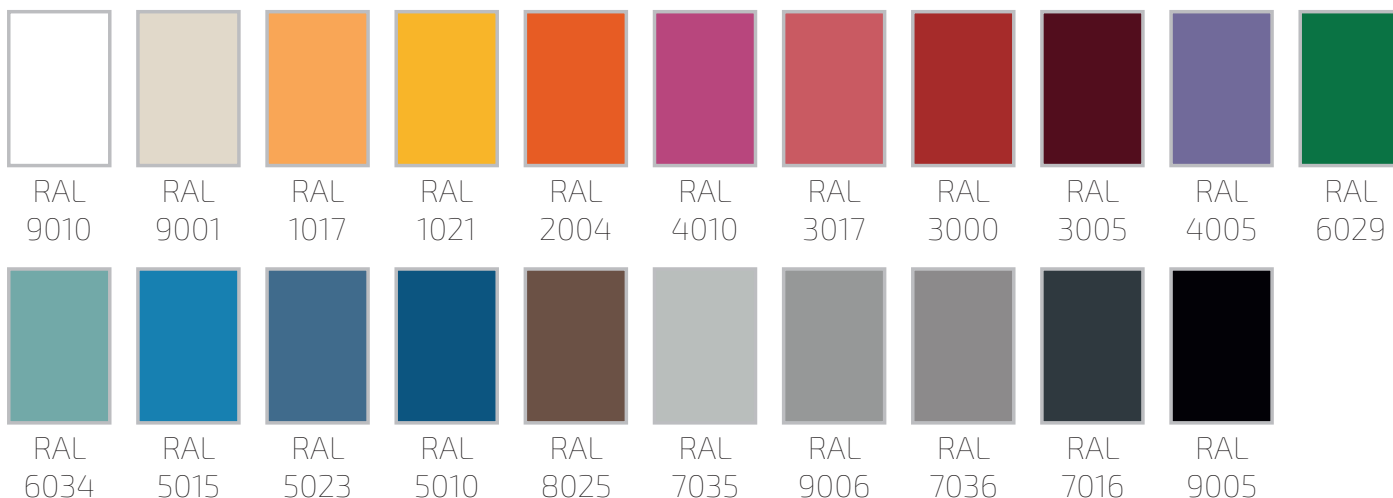


LOCKS



OPTIONS

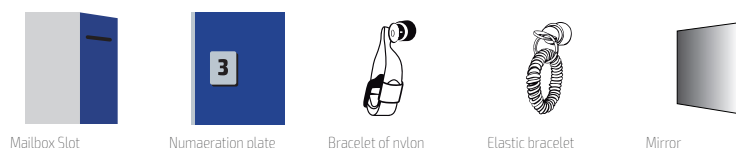

COMBINATIONS AND DIMENSIONS

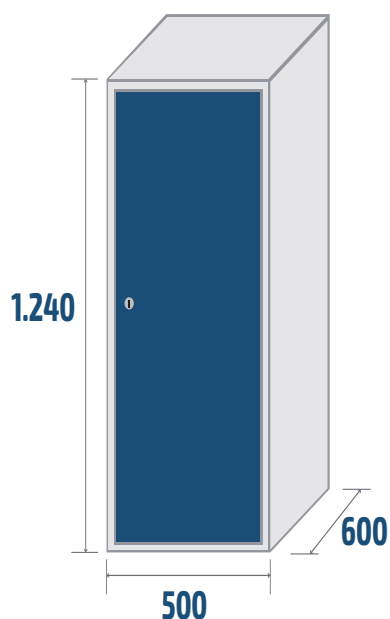

TGOLF1P

COD: 99600

21kg · 0,37m³



CGOLF1P

COD: 99500

22kg · 0,37m³

