



TECHNICAL DATA SHEET
SPECIAL LOCKERS
CLEANING MATERIAL LOCKER



CHARACTERISTICS

Welded Monoblok Lockers, manufactured with cold laminated sheet metal DC01, according to the European Norm EN 10130, with a carbon content of less than 0,12%. Metal thickness of 0,6 mm.

Welding process by point welding.

Previous treatment of passivating and degreasing with amorph bonderizing before performing the painting process.

Dried in a polimerization oven at 180°C during 15 minutes. Painting with Epoxy-polyester powder in robotized cabins.

Body and door in grey RAL 7035, micro-textured finish. Minimum thickness of the painting: 50 microns.

Door with welded reinforcement and ventilation rosette.


Chromed standard cylinder locks with two keys per door.

Anti-humidity PVC- floor mat.

Box with hooks and coat rod included.




COLOURS

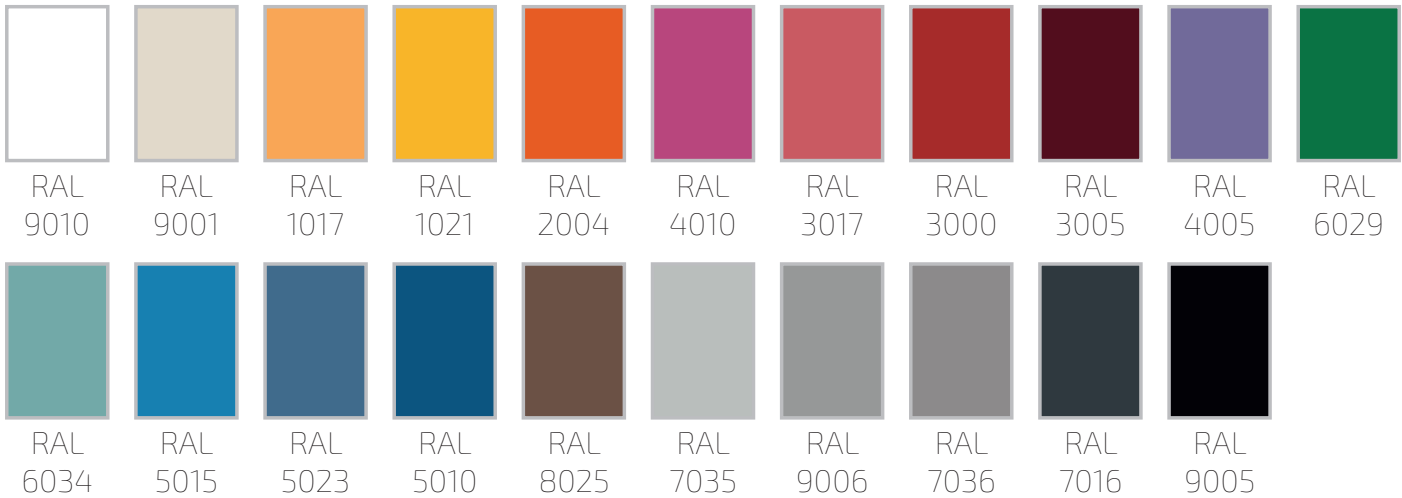

LOCKS



DIMENSIONS

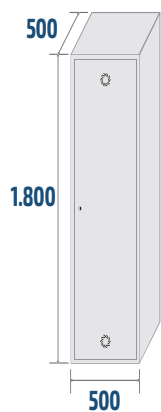

AL-1
COD: 42000

INTERIOR MEASUREMENTS (mm)

MODEL	900		
	HEIGHT	WIDTH	DEPTH
AL-1	1.692/490	432/225	473