



TECHNICAL DATA SHEET
CHARGING BOXES

6P and 12P

by  **MEGABLOK**





CHARGING BOX 6P



CHARGING BOX 12P

CHARACTERISTICS

Characteristics

Welded Monoblok Lockers, manufactured with cold laminated sheet metal DC01, according to the European Norm EN 10130, with a carbon content of less than 0,12%.

Metal thickness of 0,8 mm.

Previous treatment of passivating and degreasing with amorph bonderizing before performing the painting process.

Dried in a polimerization oven at 180°C during 15 minutes.

Painting with Epoxy-polyester powder in robotized cabins.

Door and body painted in grey RAL 7035 Micro.textured finish. Minimum thickness of the painting: 50 microns.

Chromed standard cylinder locks with two keys per door.

Welded structure.






















Self closing.

Connected to the power.

USB cables.



COLOURS

										
RAL 9010	RAL 9001	RAL 1017	RAL 1021	RAL 2004	RAL 4010	RAL 3017	RAL 3000	RAL 3005	RAL 4005	RAL 6029
										
RAL 6034	RAL 5015	RAL 5023	RAL 5010	RAL 8025	RAL 7035	RAL 9006	RAL 7036	RAL 7016	RAL 9005	

OPTIONS



Numeration



Vinyl



Lock of 4 manual digits with emergency key



Slope top




Base to ground



Base to wall


COMBINATIONS AND DIMENSIONS

CHARGING **BOX 12P**

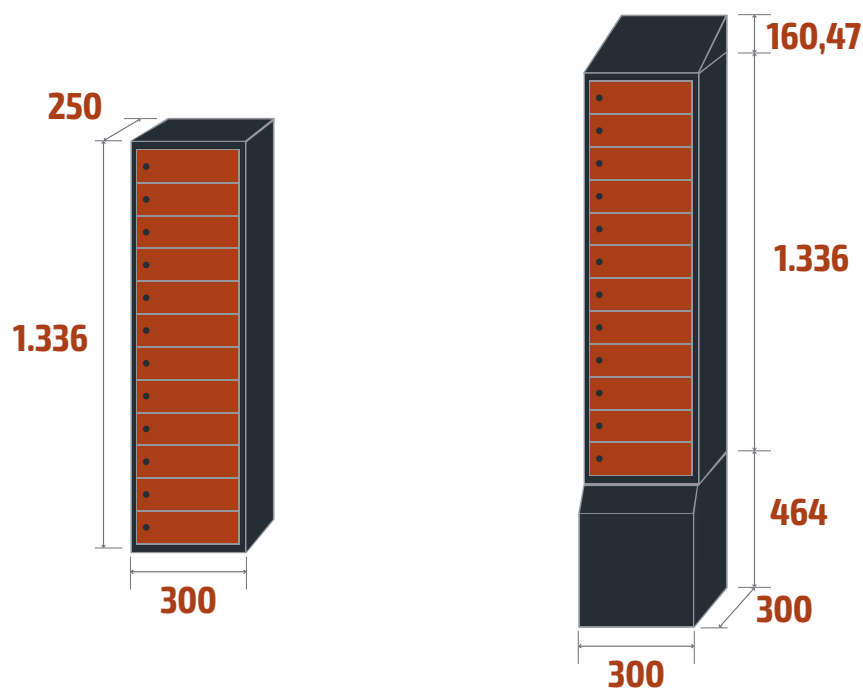

CHARGING **BOX 12P**
COD: 34008 • **12** doors

CHARGING **BOX 6P**

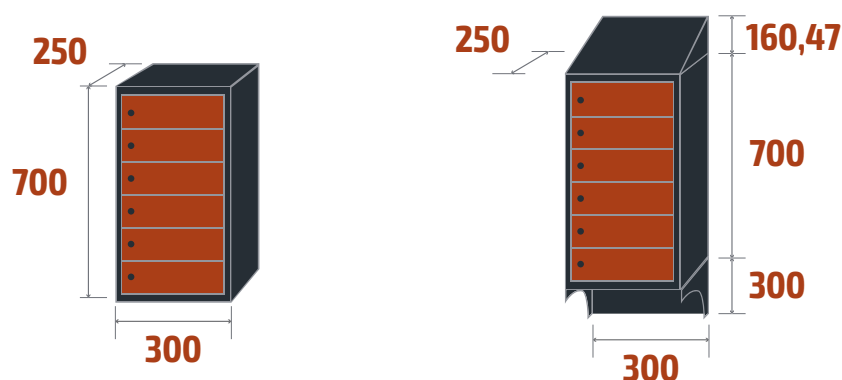

CHARGING **BOX 6P**
COD: 34000 • **6** doors