




TECHNICAL DATA SHEET  
**LEFT-LUGGAGE LOCKERS**  
*GOLF SERIES*

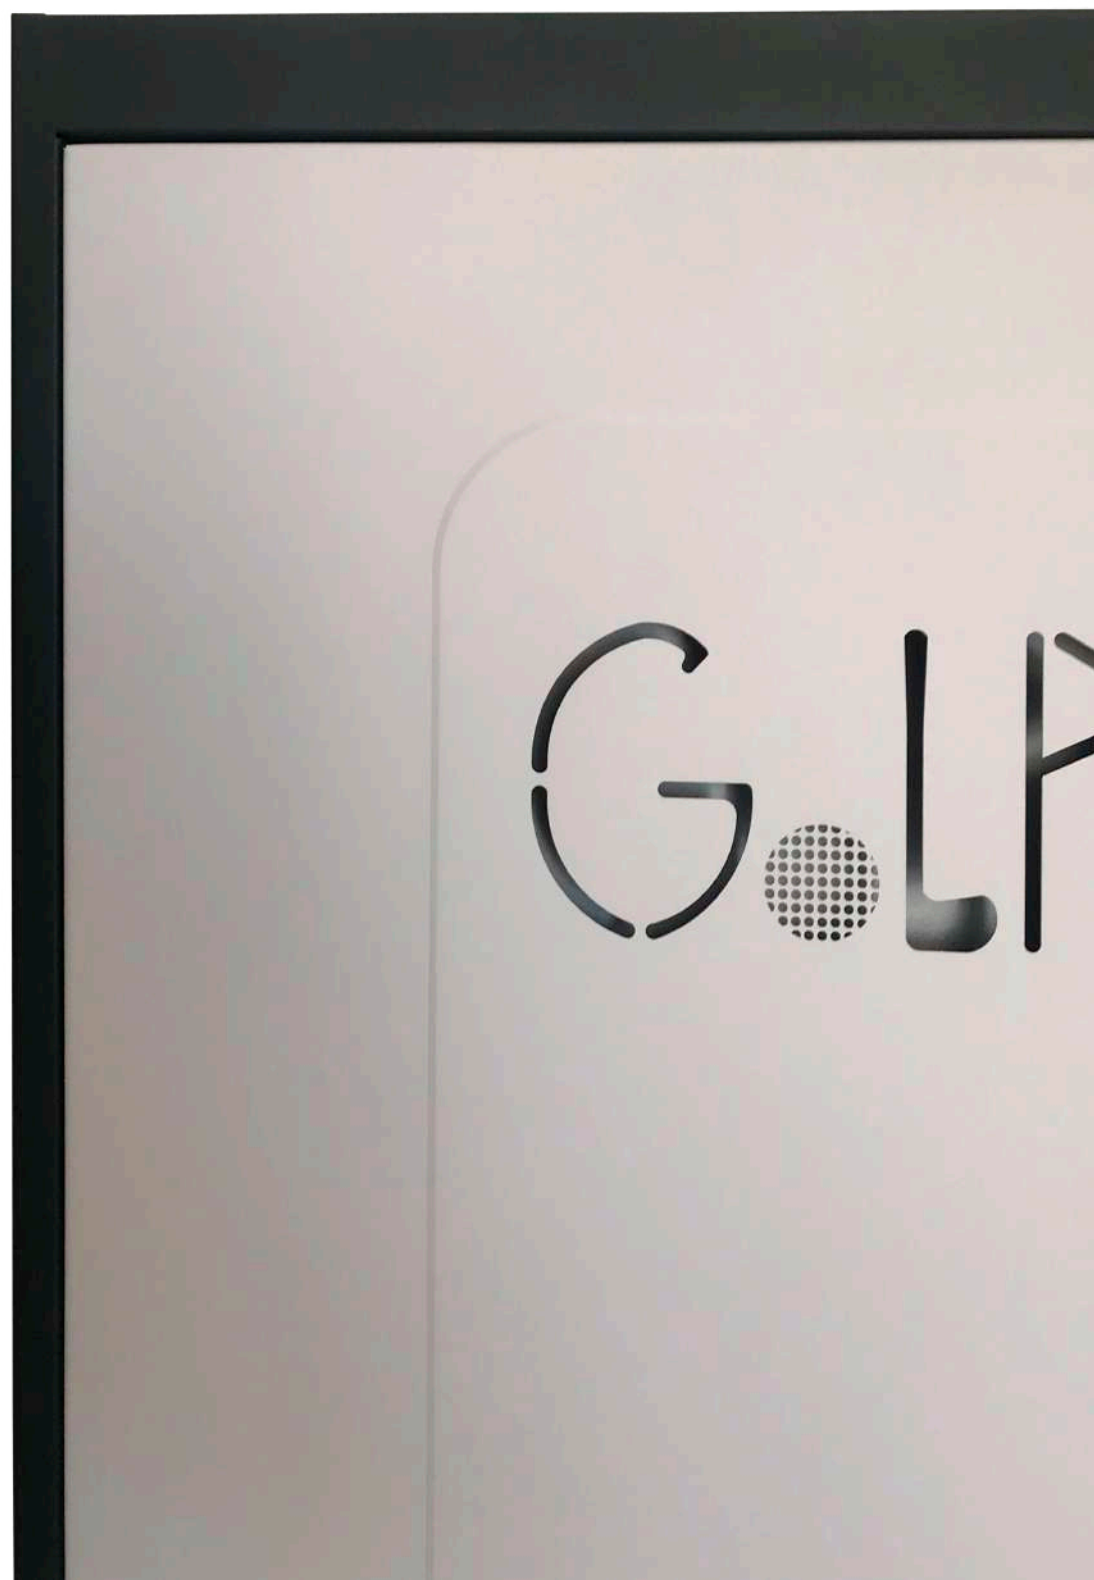

## CHARACTERISTICS

Welded monoblok locker manufactured of cold laminated steel sheet metal, quality DC01, according to the european norm EN 10130 with a carbon content of less than 0.12%. Thickness of 0.8 mm.

Point welding process.

Previous treatment of passivating and degreasing with amorph bonderizing before performing the painting process.

Dried in a polimerization oven at 180°C during 15 minutes Painting with Epoxy-polyester powder in robotized cabins.

Body and doors in grey RAL 7035 Micro textured finish, Minimum thickness of the painting: 50 microns.


With chromed cylinder lock with two keys or with coin operated lock (1,- € lock, coin-return system) with removable cylinder with 2 keys.

Union-screws included.

Monoblok construction.




## COLOURS

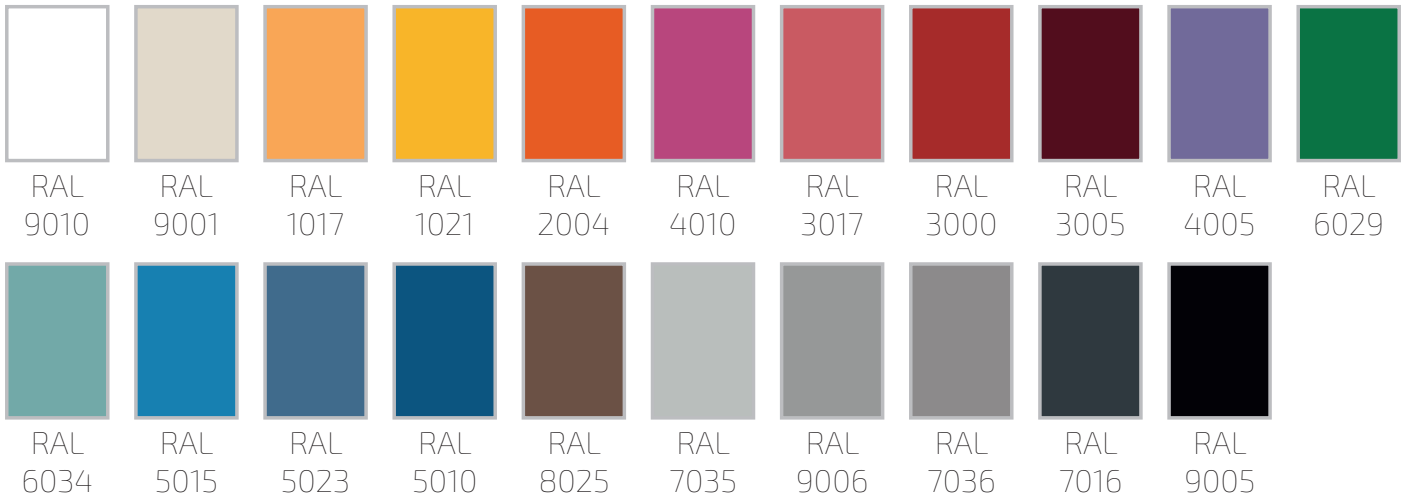


## LOCKS



## OPTIONS

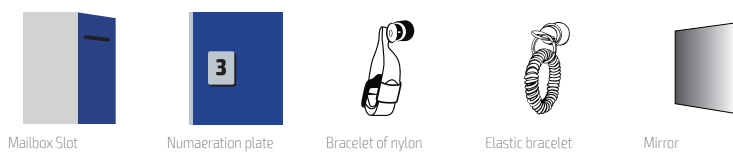

# COMBINATIONS AND DIMENSIONS

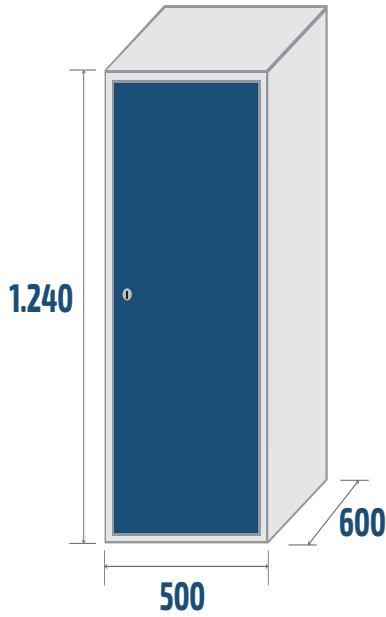

## TGOLF1P

COD: 99600

21kg · 0,37m<sup>3</sup>



## CGOLF1P

COD: 99500

22kg · 0,37m<sup>3</sup>



INTERIOR MEASUREMENTS (mm)

MODEL	INTERIOR MEASUREMENTS (mm)		
	HEIGHT	WIDTH	DEPTH
TGOLF1P / CGOLF1P	1.156	433	574